

(12) UK Patent Application (19) GB (11) 2 295 838 (13) A

(43) Date of A Publication 12.06.1998

(21) Application No 9524108.9

(22) Date of Filing 24.11.1995

(30) Priority Data

(31) 944539

(32) 25.11.1994

(33) NO

(71) Applicant(s)

Den Norske Stats Oljeselskap A S

(Incorporated in Norway)

Forus, Postboks 300, N-4035 Stavanger, Norway

(72) Inventor(s)

Thor Bjørnstad

(74) Agent and/or Address for Service

Marks & Clerk

57-60 Lincoln's Inn Fields, LONDON, WC2A 3LS,

United Kingdom

(51) INT CL⁶

E21B 37/02 31/06 31/08

(52) UK CL (Edition O)

E1F FAW FAW2 FAW3 FLC

(56) Documents Cited

WO 92/19838 A1 US 4296822 A

(58) Field of Search

UK CL (Edition O) E1F FAW FLC

INT CL⁶ E21B

Online: WPI

(54) Means for collecting unwanted material in an oil or gas well

(57) Means for collecting and bringing up unwanted material from an oil or gas well comprises a grinder or mill 6 having a coating 8 of a wear resistant material along its front and outer surfaces, the mill 6 being secured to a throughgoing drilling pipe having an inner concentric liquid channel 7, the axially leading facing end of the mill 6 comprising a channel 4 extending through the mill 6 and into a junk chamber 3 behind or after the mill 6, the upper end of the means comprising a strainer 2 allowing penetration of liquid, but restraining the material, the rotation of the means from the throughgoing drilling pipe thereby ensuring that junk is brought into the channel 4 and from here into the junk chamber 3.

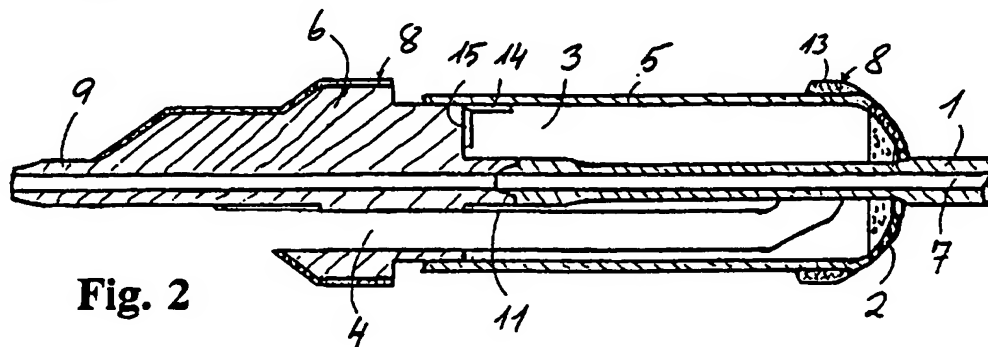


Fig. 2

GB 2 295 838 A

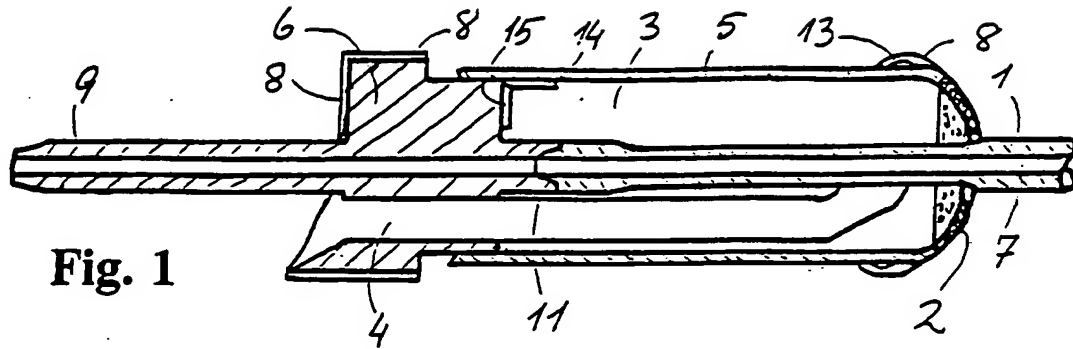


Fig. 1

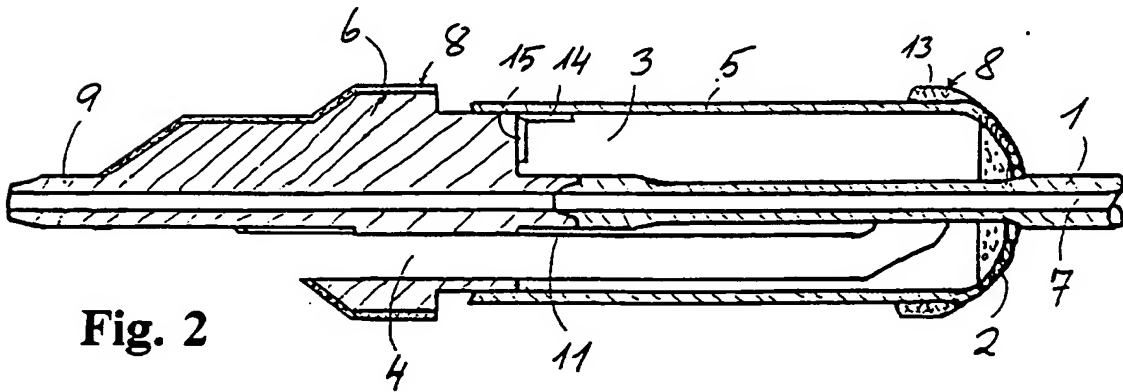


Fig. 2

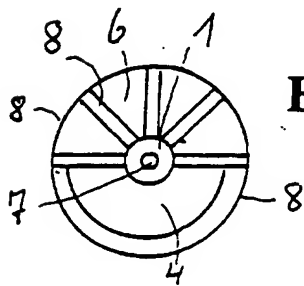


Fig. 3

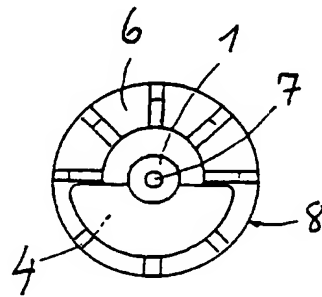


Fig. 4

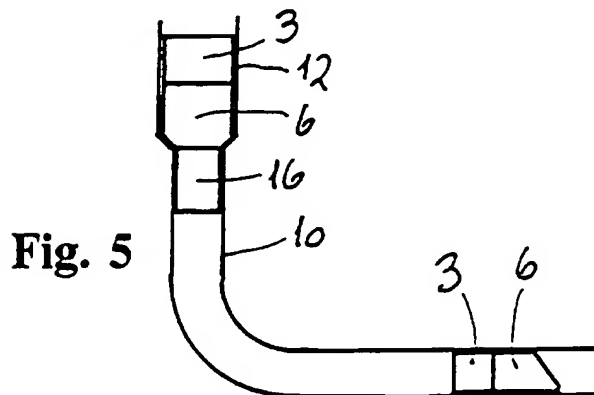


Fig. 5

MEANS FOR COLLECTING UNWANTED MATERIAL IN AN OIL OR GAS WELL

The present invention is related to a means for collecting unwanted material in an oil or gas well.

Means of the above mentioned type especially are used during completing and maintenance of wells, normally being denoted junk collectors. Unwanted material in a well may be loose or fixed material or objects.

Within the oil technology several known developments are known for removing material from a well. Mostly these have been developed and are used in wells extending vertically. With the development of deviation wells the need has arisen for using junk collectors being effective also in cases where a substantially horizontal well shall be completed or maintained.

GB 2 206 508 describes a junk collector having "shelves" intended to collect the junk when the fluid flow is given a centrifugal movement. Another embodiment is disclosed in US 4 603 739 and comprises scrapers gliding along the casing wall thereby bringing the collected junk into a chamber in the junk collector, which chamber is closed by valves. By means of these valves the material is collected in the chamber which later can be taken up to the surface and emptied. Other such embodiments are described in US 4 703 804 and US 4 838 354.

With the means according to the present invention collecting loose and jammed material or objects in all types of wells, vertical as well as deviation wells, is made possible. This is achieved with the means according to the invention as defined with the features stated in the claims.

Several means according to the invention may be secured to the drilling pipe and brought down into the well by means of the drilling pipe, one to clean and remove material from the production pipe and one to clean and polish the transition between the casing (normally 8½" inwardly) and the production pipe or liner (normally 6" inwardly).

In the drawing figure 1 discloses an axial cross section through one embodiment of a means according to the present invention, figure 2 discloses a corresponding axial section through a further embodiment, figure 3 discloses an axial view seen from the left hand side of figure 1, figure 4 discloses an axial view seen from the left hand side of figure 1 and figure 5 discloses an axial view seen from the left hand side of figure 1.

5 discloses schematically the use of the means according to the present invention in a section through a formation, a casing pipe and a production pipe.

Figure 1 discloses the means connected with a drilling
5 pipe 1, comprising a throughgoing centric channel 7 for transfer of drilling fluid. The means or the tool comprises a grinding device or mill 6 having an outer diameter with tolerances corresponding with the inner diameter of the pipe in which the means is intended to work. The drilling pipe 1 with its fluid
10 channels 7 extends through the mill 6. The outer surface 8 of the mill is covered by a material being specially resistant to wear, such as tungsten carbide. The mill 6 comprises a channel 4 through which drilling fluid and milled material or other junk from the well is pressed when the means with the drilling pipe
15 is pulled down into the well. The junk is pressed into the junk chamber 3, whereas the drilling fluid will be pressed out through a strainer 2 arranged at the upper end of the means.

In the front area of the junk chamber there preferably are arranged magnets 14 and 15 which are secured to, but isolated
20 from, the outer wall 5 of the chamber or to the mill 6. These magnets will ensure that magnetic material will remain in the junk chamber 3.

A bead 13 is arranged near the upper end of the means. This bead 13 has an outer diameter substantially corresponding
25 with the diameter of the mill, namely the outer diameter which with tolerances should correspond with the inner diameter of the pipe in which the means is intended to operate. On the outer surface of the bead a wear resistant material 8, preferably a layer of tungsten carbide, is arranged.

30 If problems arise in taking the tool out of the well, for example may objects or material parts hinder hauling of the pipe or make it difficult, this bead 13 with its tungsten carbide layer 8 may function as a mill when the tool is rotated by the drilling string. This will ensure safe hauling of the tool.
35 Additionally the tool thereby will be more stable in the direction as the upper end of the tool has substantially the same diameter as the mill.

The means according to figure 2 typically will be used to polish the transition from casing pipe to production pipe. As

the production pipe has smaller diameter than the casing pipe, the means disclosed in figure 2 is meant to be brought down into the casing pipe until it lands on the start of the production pipe. The outer diameter of the equipment will correspond with the diameter of the casing pipe.

The means according to figure 2 will provide the necessary polishing of the transition between the casing pipe and the production pipe.

It may be suitable to arrange a junk collector as disclosed in figure 1 having a diameter corresponding with the inner diameter of the production pipe and a junk collector as disclosed in figure 2 having a diameter corresponding with the inner diameter of the casing pipe, both on the same drilling pipe. They then will be arranged after each other, having a distance such as the length of the production pipe in the well. It then will be possible in the same operation to complete an entire well, its production pipe and its casing pipe and simultaneously to polish the transition between the production pipe and the casing pipe at the same time.

The mill 6 may have a cylindric and conical-spiral outer shape. Furthermore the mill 6 preferably comprises two substantially semi cylindrical parts having different outer diameters and having between the outer and middle and between this and the outer diameter of the drilling pipe conical and spiral leading ends, likewise being coated with wear resistant material.

Figure 1 discloses that the strainer 2 is arranged at the upper end of the junk collector and surrounds the drilling pipe 7. The apertures of the strainer 2 may be displaced across the entire diameter of the chamber, or only across parts of it.

Important with the present invention is a means which can be brought down into the well, rotated by means of the drilling pipe to mill unwanted objects or material and which collects this well junk in a suitable junk chamber. The drilling pipe provided with one or more junk collectors thereafter is hauled up to the surface where the junk store is emptied. The junk collector leaves a clean and completed well.

The junk collector according to the present invention ensures that junk is forced all the way into the junk chamber 3

when the drilling pipe and thereby the junk collector is rotated. Figure 5 discloses an example of how the junk collector according to the present invention may be utilized in practical operation. A leading junk collector having a mill 6 and a junk chamber 3 is
5 secured to the end of the drilling pipe and is brought in to the horizontal part of the production pipe 10. At a fixed distance from the leading junk collector a PBR or reamer 16 is arranged in such a way the it reams the first portion of the production pipe 10 after the transition from the casing pipe. An upper junk
10 collector, likewise with a mill 6 and a junk chamber 3, thereby fits against the transition between the casing pipe 12 and the production pipe 10.

15

20

25

30

35

P a t e n t C l a i m s

1. Means for collecting and bringing up unwanted
5 material from an oil or gas well, **CHARACTERIZED IN** the means
comprising a grinder or mill and a coating of a wear
resistant material along its front and outer surfaces, the mill
being secured to a throughgoing drilling pipe having an inner
centric liquid channel, the axially leading facing end of the
10 mill comprising a channel extending through the mill
and into a junk chamber behind or after the mill, the
upper end of the means comprising a strainer allowing
penetration of liquid, but restraining the material, the rotation
of the means from the throughgoing drilling pipe thereby ensuring
15 that junk is brought into the channel and from here into the
junk chamber.

2. Means according to previous claim, **CHARACTERIZED IN**
the leading end faces of the mill comprising several
forwardly protruding webs or cutters coated with wear resistant
20 material.

3. Means according to previous claims, **CHARACTERIZED IN**
the wear resistant material being tungsten carbide.

4. Means according to previous claims, **CHARACTERIZED IN**
the front end of the channel having a funnel shape to assist
25 bringing the material into the opening.

5. Means according to previous claims, **CHARACTERIZED IN**
the mill comprising two substantially semi cylindrical parts
having different outer diameters and having between the outer and
middle and between this and the outer diameter of the drilling
30 pipe conical and spiral leading ends, likewise being coated with
wear resistant material.

6. Means according to previous claims, **CHARACTERIZED IN**
a bead being arranged around the outer wall of the
means, near the strainer, the bead preferably being
35 axially rounded and having a coating of wear resistant material,
such as tungsten carbide and that the largest diameter of the
bead being substantially the same as but not larger than the
outer diameter of the mill.

7. Means according to previous claims, **CHARACTERIZED IN**

at least one magnet plate being arranged in the junk chamber, preferably being secured isolated to respectively the mill and the inner wall of the cylindrical wall, being adapter to capture collected junk.

5

10

15

20

25

30

35



The
Patent
Office

7

Application No: GB 9524108.9
Claims searched: 1 to 7

Examiner: David Harrison
Date of search: 19 January 1996

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.O): E1F (FAW, FLC)

Int Cl (Ed.6): E21B

Other: Online: WPI

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	WO 92/19838 A1 (Peco Machine Shop & Inspection Services Limited)	1
A	US 4296822 (Ormsby)	1

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.
& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.